


UPM3 FLEX AS 15-70 130, 25-70 130, 25-70 180

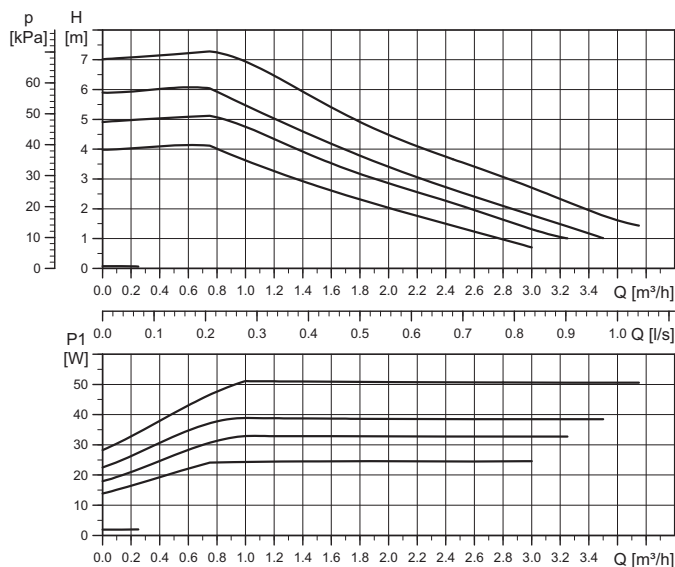

High efficiency

Ready for Ecodesign 2015

EEI ≤ 0.20 Part 3

$P_{L,avg} \leq 23 \text{ W}$


TM06 0584 0814

UPM3 FLEX AS 15-70 130, 25-70 130, 25-70 180

Performance curve

Electrical data, 1 x 230 V, 50 Hz		
Speed	P_1 [W]	$I_{1/1}$ [A]
Min.	2	0.04
Max.	52	0.52

Note: For PWM speed curves see data sheet UPM3 15-70 130, 25-70 130, 25-70 180.

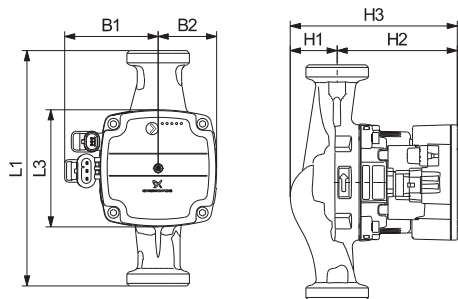

TM05 8555 0114



TM06 0765 0914

Dimensions

Control box position

Pump type	Dimensions [mm]							Connections	Weight [kg]
	L1	L3	B1	B2	H1	H2	H3		
UPM3 FLEX AC 15-70 130	130	90	72	45	36	92	128	G 1	1.8
UPM3 FLEX AC 15-70 130	130	90	72	45	36	92	128	G 1 1/2	1.9
UPM3 FLEX AC 15-70 180	180	90	72	45	36	92	128	G 1 1/2	2.0

Technical data

System pressure	Max. 1.0 MPa (10 bar)	Enclosure class	IP44 (non-condensing)
Minimum inlet pressure	0.05 MPa (0.50 bar) at 95 °C liquid temperature	Motor protection	No external protection needed
Liquid temperature	+2 °C to +110 °C (TF110)	Approval and marking	VDE, CE